

H	S	K
800	1140	1393
1000	1425	1741
1200	1710	2089
1400	1995	2437
1600	2280	2785
1800	2565	3133
2000	2850	3481
2200	3135	3830
2400	3420	4178

ELEVATION

NOT TO SCALE

NOTES


- 1- DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN
- 2- MINIMUM HEAD CLEARANCE SHALL BE 2100.
- 3- GRATING IS HOT DIP CALVANIZED SERRATED TYPE CONFORMING TO BS'4592, PT.1 (REFER TO IPS - M - CE - 105/2)
- 4- STAIRS AND HANDRAILS TO BE FABRICATED IN SECTIONS AT SHOP (PREFERABLY) FOR FIELD ASSEMBLY.
- 5- FOR ANY VARIATIONS OR SPECIAL CONDITIONS SEE INDIVIDUAL ENGINEERING DRAWINGS.
- 6- STAIRS SHALL BE SHIPPED ASSEMBLED UNLESS NOTED OTHERWISE.
- 7- ALL SHARP CORNERS & BURRS SHALL BE REMOVED BEFORE APPLICATION OF PRIMER PAINT.
- 8- DIMENSIONS OF CHANNEL SECTIONS SHALL BE IN ACCORDANCE WITH ISO 657/11-1980 (REFER TO IPS - M - CE - 105/2)
- 9- DIMENSIONS OF ANGLE SECTIONS SHALL BE IN ACCORDANCE WITH ISO 657 - 1 & 2 (REFER TO IPS - M - CE - 105/2)
- 10- FOR DETAILS A , B , C AND D SEE SHEETS 2 AND 3 OF THIS DRAWING.
- 11- FOR BENDING SCHEDULE SEE SHEET 2 OF THIS DRAWING.

REV	DESCRIPTION	DATE
C		
B		
A		


IRANIAN PETROLEUM STANDARDS 
 NO REVISION PERMITTED UNLESS APPROVED BY STANDARD ORGANIZATION

INDUSTRIAL PLATFORM & STAIRS
 TYPICAL DETAILS

DATE	DRAWING No.	SHEET	REV.
	IPS - D - CE - 142	1	3

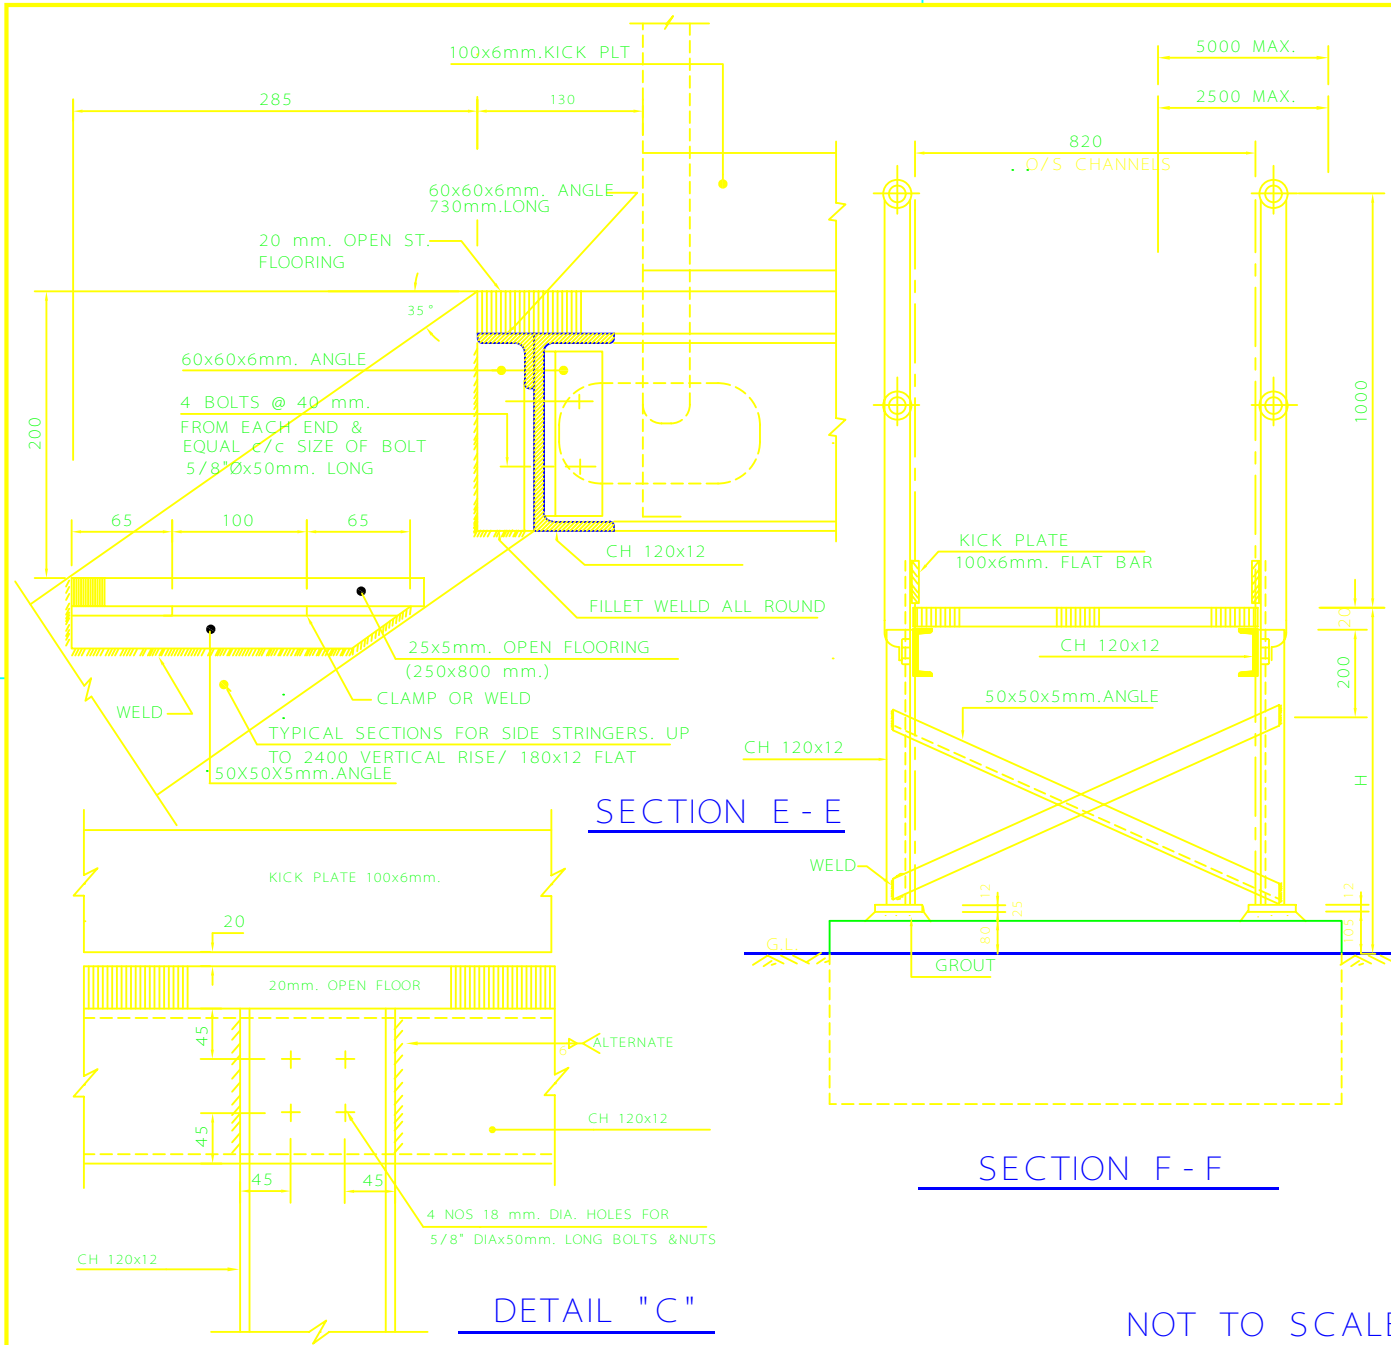

NOTES

C			
B			
A			
REV	DESCRIPTION	DATE	
IRANIAN PETROLEUM STANDARDS 			
NO REVISION PERMITTED UNLESS APPROVED BY STANDARD ORGANIZATION			
INDUSTRIAL PLATFORM & STAIRS TYPICAL DETAILS			
DATE	DRAWING No.	SHEET	REV.
	IPS - D - CE - 142	3	3

NOT TO SCALE