


SECTION "A - A"

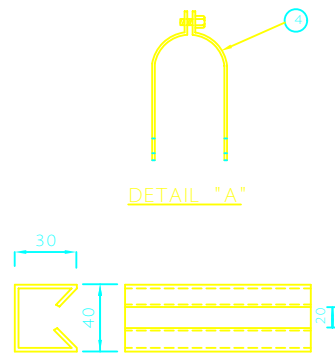

## NOTES

- 1- ALL DIMENSIONS ARE IN MILLIMETERS
- 2- MASONRY ANCHOR SHALL BE SUITABLE FOR REINFORCED CONCRETE AND MASONRY BUILDING.

No.	DESCRIPTION	QTY.
1	MASONRY ANCHOR	
2	M8x15L BOLT & NUT WITH 1-SPRING & 2 FLAT WASHERS FOR MASONRY ANCHOR	
3	UNISTRUT CHANNEL ([40X30X10X2.5thkx120L])	
4	UNISTRUT CLAMP WITH BOLT/NUT.	

REV	DESCRIPTION	DATE
C		
B		
A		

IRANIAN PETROLEUM STANDARDS 

NO REVISION PERMITTED UNLESS APPROVED BY STANDARD ORGANIZATION

REFERENCE DRAWING  
POWER INSTALLATION DETAILS  
"CATEGORY 200"  
CONDUIT & CABLE SUPPORT

DATE	DRAWING No.	SHEET	REV.
	IPS - D - EL - 211	1	1