




## NOTES

- 1- ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE NOTED.
  - 2- THE WINDING HANDLE SHALL BE PAINTED AS FOLLOWS:
    - SURFACE PREPARATION TO ST3.
    - ONE LAYER OF ANTI-RUST ALKYL PRIMER WITH THICKNESS OF 75 MICRONS(min.)
    - ONE LAYER OF INTERMEDIATE ALKYL PAINT WITH THICKNESS OF 100 MICRONS(min.)
    - ONE LAYER OF ALKYL ALUMINUM PAINT AS TOP COAT WITH THICKNESS OF 100 MICRONS (min.).
- PAINTS SHALL BE OF BEST QUALITY AVAILABLE.

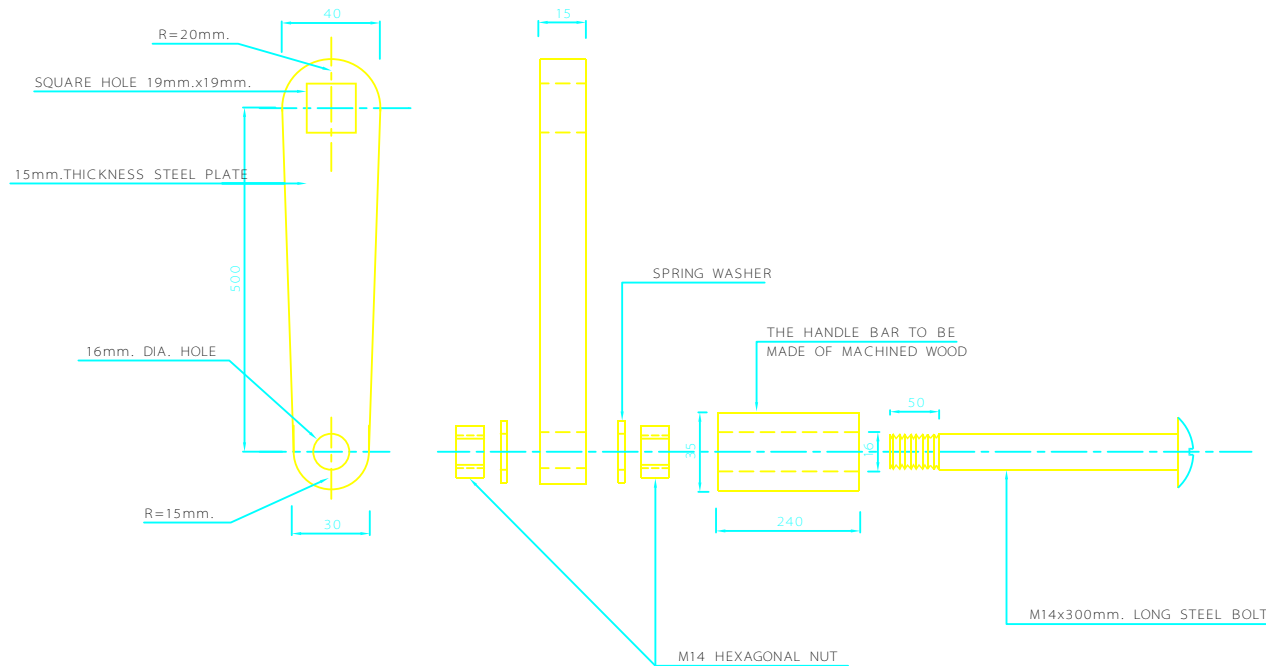

3 - WINDING HANDLE

C		
B		
A		
REV	DESCRIPTION	DATE

IRANIAN PETROLEUM STANDARDS   
 NO REVISION PERMITTED UNLESS APPROVED BY STANDARD ORGANIZATION

CATHODIC PROTECTION SYSTEM  
 CONSTRUCTION DETAILS OF ROPE & CABLE DRUM  
 FOR WATER TYPE DEEP-WELL GROUND BEDS

DATE	DRAWING No.	SHEET	REV.
	IPS - D - TP - 708	2	2